


- MIE 350 MAG MPI SKI WITH VELVET DRIVE 71C IN-LINE TRANSMISSION
- (1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
 - (2) SELECT THE APPROPRIATE EXHAUST RISE-HEIGHT TO MAINTAIN A MINIMUM OF 13 in. (330mm) BETWEEN THE TOP OF THE EXHAUST ELBOW AND THE WATERLINE OF THE BOAT AT MAXIMUM RATED LOAD.
 - (3) EXHAUST OUTLETS MUST BE ABOVE WATERLINE OF BOAT AT MAXIMUM RATED LOAD.
 - (4) NUMBERS INSIDE BRACKETS "[]" ARE IN MILLIMETERS.

UNIT OF MEASURE	SCALE APROX.
in. (mm)	1" = 1" 25.4mm = 304mm

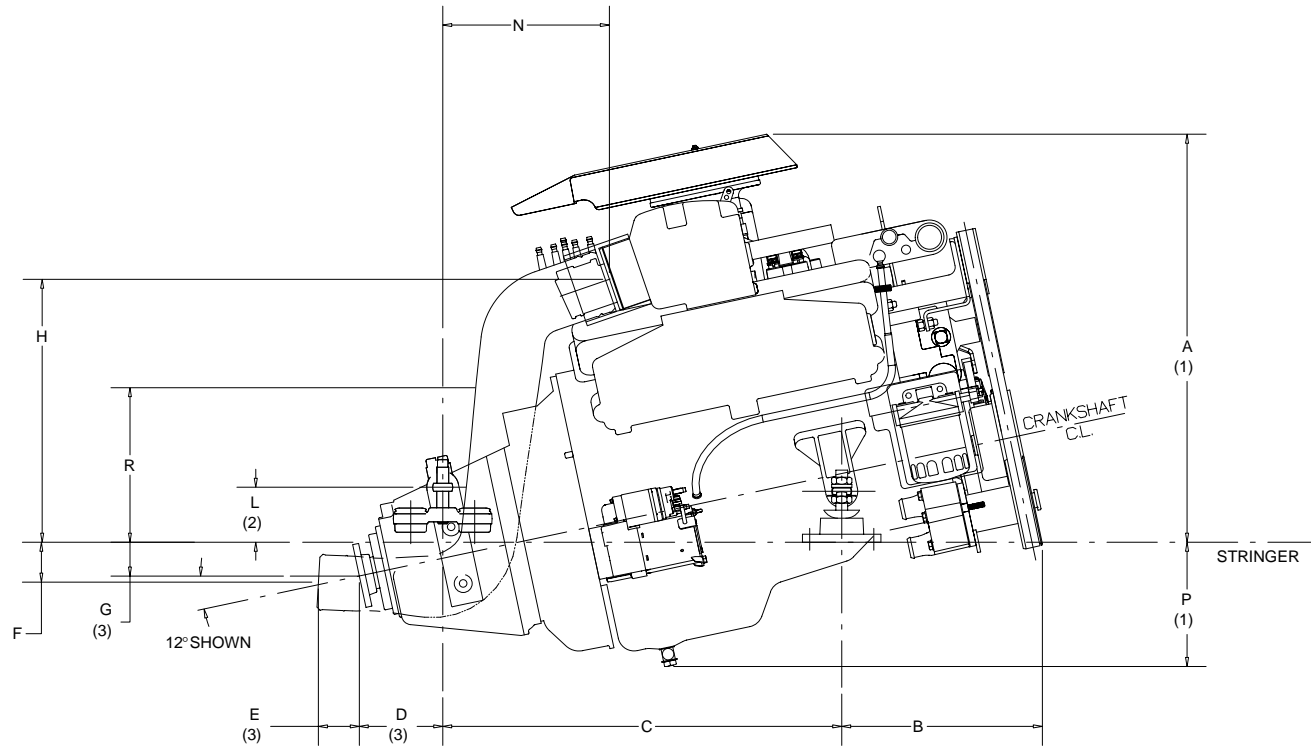

DIMENSIONS	PROPSHAFT ANGLE		
	10°	12°	15°
A	651	647	640
B	315	318	322
C	632	633	633
D	133	132	125
E	65	65	64
F	34	63	107
G	27	54	93
H	430	417	397
L	109	87	54
N	276	264	247
P	187	197	211
R	265	245	215

METRIC
MM.

DIMENSIONS	PROPSHAFT ANGLE		
	10°	12°	15°
A	25-5/8	25-1/2	25-3/16
B	12-7/16	12-9/16	12-11/16
C	24-7/8	24-15/16	24-7/8
D	5-1/4	5-3/16	4-15/16
E	2-9/16	2-9/16	2-1/2
F	1-3/8	2-1/2	4-3/16
G	1-1/16	2-1/8	3-11/16
H	16-15/16	16-7/16	15-5/8
L	4-5/16	3-7/16	2-1/8
N	10-7/8	10-7/16	9-11/16
P	7-3/8	7-3/4	8-5/16
R	10-7/16	9-5/8	8-1/2

ENGLISH
IN.

MIE 350 MAG MPI SKI WITH VELVET DRIVE 71C
IN-LINE TRANSMISSION.

- (1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
- (2) BASE OF MOUNT TO BE PARALLEL TO STRINGER. MOUNTS SHOWN AT CENTER OF ADJUSTMENT.
- (3) DIMENSIONS APPLY TO POINT OF INTERSECTION OF OUTPUT SHAFT CENTERLINE AND OUTPUT FLANGE FACE.