



UNIT OF MEASURE in. (mm)	SCALE APPROX. 1" = 1' 25.4mm = 304mm
-----------------------------	--

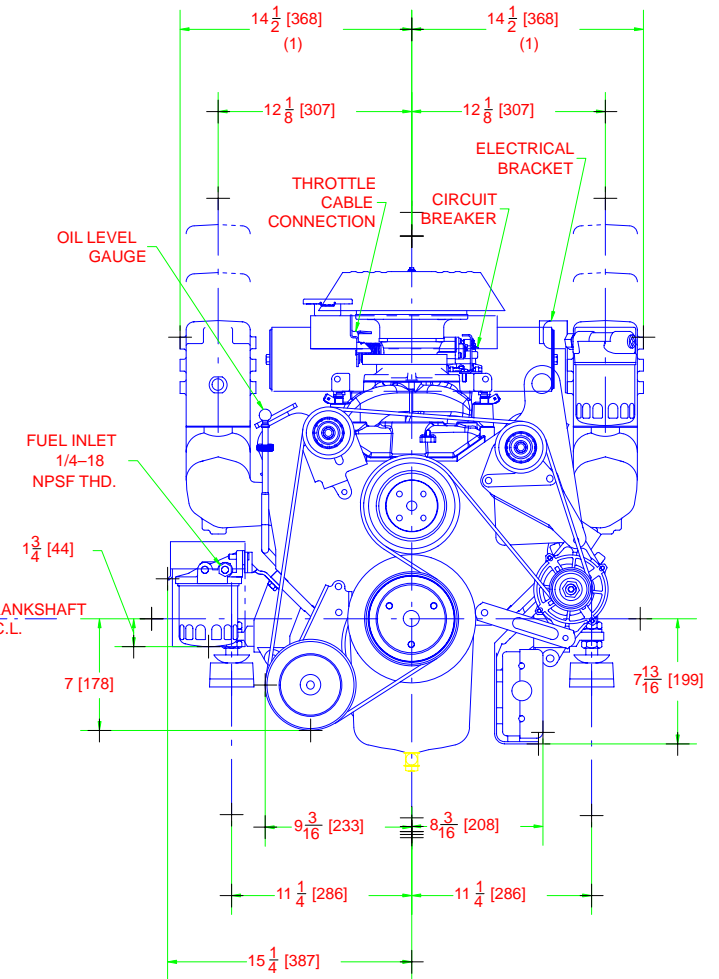

MIE 350 MAG MPI SKI WITH VELVET DRIVE 72C IN-LINE TRANSMISSION

- (1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
- (2) SELECT THE APPROPRIATE EXHAUST RISE-HEIGHT TO MAINTAIN A MINIMUM OF 13 in. (330mm) BETWEEN THE TOP OF THE EXHAUST ELBOW AND THE WATERLINE OF THE BOAT AT MAXIMUM RATED LOAD.
- (3) EXHAUST OUTLETS MUST BE ABOVE WATERLINE OF BOAT AT MAXIMUM RATED LOAD.
- (4) NUMBERS INSIDE BRACKETS "[]" ARE IN MILLIMETERS.

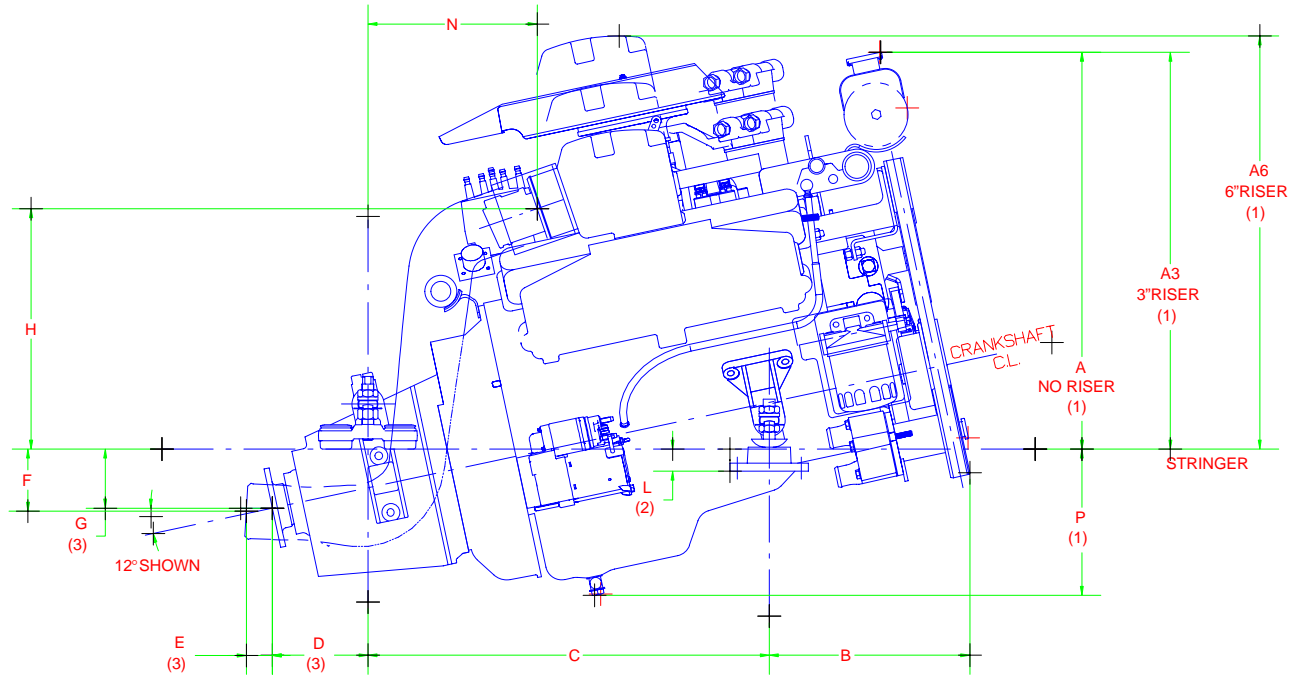

DIMENSIONS	PROPSHAFT ANGLE		
	10°	12°	15°
A STANDARD	601	630	672
A3 (3" RISER)	601	630	672
A6 (6" RISER)	642	656	676
B	315	318	322
C	636	637	638
D	157	152	143
E	42	42	42
F	92	98	108
G	88	94	101
H	372	382	395
K	873	858	833
L	57	35	2
N	279	269	252
P	245	232	213

METRIC
MM.

DIMENSIONS	PROPSHAFT ANGLE		
	10°	12°	15°
A STANDARD	23-11/16	24-13/16	26-7/16
A3 (3" RISER)	23-11/16	24-13/16	26-7/16
A6 (6" RISER)	25-1/4	25-13/16	26-5/8
B	12-7/16	12-9/16	12-11/16
C	25-1/16	25-1/16	25-1/8
D	6-3/16	5-15/16	5-5/8
E	1-5/8	1-5/8	1-5/8
F	3-5/8	3-7/8	4-1/4
G	3-1/2	3-11/16	4
H	14-5/8	15	15-9/16
K	34-3/8	33-3/4	32-13/16
L	2-1/4	1-3/8	1/16
N	11	10-9/16	9-15/16
P	9-5/8	9-1/8	8-3/8

ENGLISH
IN.

MIE 350 MAG MPI SKI WITH VELVET DRIVE 72C
IN-LINE TRANSMISSION.

- (1) DIMENSIONS REQUIRE A MINIMUM 1/2 in. (13mm) CLEARANCE FOR MOTOR MOUNT DEFLECTION.
- (2) BASE OF MOUNT TO BE PARALLEL TO STRINGER. MOUNTS SHOWN AT CENTER OF ADJUSTMENT.
- (3) DIMENSIONS APPLY TO POINT OF INTERSECTION OF OUTPUT SHAFT CENTERLINE AND OUTPUT FLANGE FACE.

